



FLUA

ARCHITECTURAL
LIGHTING

FLUA Catalogue

AMBIENT CREATOR

Last Edited : 23/04/2025

www.dessled.co



DESS



DESSGLSLED



GLPR003928
ULTRA 1.5M RECESSED

GLPR003929
ULTRA 2.5M RECESSED



GLPR003351
ULTRA POWER CONNECTOR



GLPR003450
ULTRA MIDDLE JOIN



GLPR542019EZB2
ULTRA SPOT LIGHT



GLPR543219ZB2
ULTRA SPOT 12



GLPR542414ZB2
ULTRA MOONLINE 600



SURFACE TRACK

GLPR001574-48V-FEED	1.0M
GLPR001575-48V-FEED	1.5M
GLPR001576-48V-FEED	2.0M
GLPR001577-48V-FEED	2.5M
GLPR001581-48V-INT	2.0M
GLPR001586 L1 JOIN - 150*150mm	
GLPR001587 L2 JOIN - 150*150mm	



POWER SUPPLY

50W-48V
100W-48V
150W-48V



Google Form Label



RECESSED TRACK

GLPR001290-48V-FEED	1.0M
GLPR001291-48V-FEED	1.5M
GLPR001292-48V-FEED	2.0M
GLPR001293-48V-FEED	2.5M
GLPR001298-48V INT	1.5M
GLPR001299-48V INT	2.0M
GLPR001300-48V INT	2.5M
GLPR001375 L JOIN - 120*120mm	
GLPR001376 L3 JOIN - 150*150mm	





POWER SUPPLY

50W-48V
100W-48V
150W-48V



FLAT CS

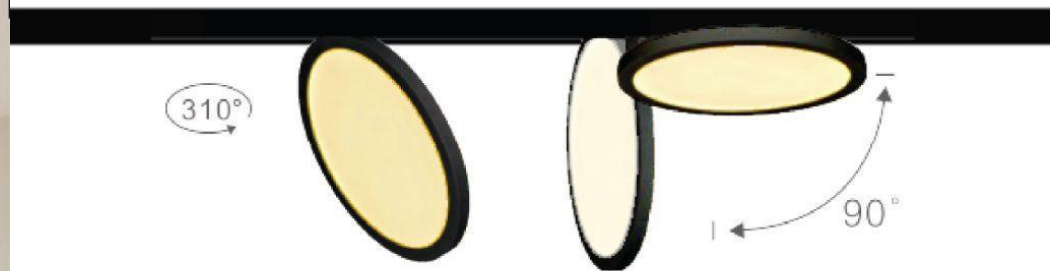


GLPR523414-48V

LUNA FLAT CS 48V

LIGHT SOURCE	: 14W
COLOR TEMP	: 3000K
LUMEN	: 611lm
INPUT VOLTAGE	: 48VDC
DRIVER	: Not Included External 48V LRS-50-48V
CRI	: 90
SIZE	: 223*24.5*185mm



LUNA ELF



GLPR523619E-WBL

LUNA ELF 48V (BLACK)

LIGHT SOURCE	: 7.5W
COLOR TEMP	: 3000K
LUMEN	: 623Lm
INPUT VOLTAGE	: 48VDC
DRIVER	: Not Included External 48V LRS-50-48V
CRI	: 90
SIZE	: 150*24.5*203mm



DESS®


ULTRA



GLPR542019EZB2

ULTRA ORIAN CK SS DO TRACK LIGHT 2700-6000K

LIGHT SOURCE	: 9.6W
LUMEN	: 630Lm
COLOR TEMP	: 2700K -
6000K	
INPUT VOLTAGE	: 48V
CRI	: 90
DIMENSION	: 45 x
116mm	

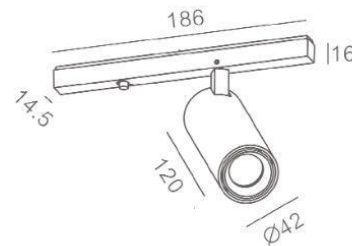

GLPR522015E

LUNA S M SPOT 12 48V

LIGHT SOURCE	: 11.6W
COLOR TEMP	: 3000K
LUMEN	: 999Lm
INPUT VOLTAGE	: 48VDC
DRIVER	: Not Included External 48V LRS-50-48V
CRI	: 90
SIZE	: 42*186*120mm





ULTRA



ULTRA

ANGLE 26°




GLPR543219ZB2

ULTRA AHRI CK SPOT 12 TRACK LIGHT 2700-6000K

LIGHT SOURCE : 6.6W
 LUMEN : 545Lm
 COLOR TEMP : 2700K -
 6000K
 INPUT VOLTAGE : 48V
 CRI

: 90


DIMENSION : 300 x 18.5
 x 16.6mm



GLPR522217

LUNA S IN SPOT 3X1 48V

LIGHT SOURCE	: 3.7W
COLOR TEMP	: 3000K
LUMEN	: 192Lm
INPUT VOLTAGE	: 48VDC
DRIVER	: Not Included External 48V LRS-50-48V
CRI	: 90
SIZE	: 150*28.5*14.6mm



GLPR520417

LUNA ON SPOT 5 48V

LIGHT SOURCE	: 5.5W
COLOR TEMP	: 3000K
LUMEN	: 424lm
INPUT VOLTAGE	: 48VDC
DRIVER	: Not Included External 48V LRS-50-48V
CRI	: 90
SIZE	: 150*102*14.6mm



LUNA S



LUNA S LINE 300 / 600 / 900 / 1200 / 1500 48V 

CRI: 90

INPUT: 48V DC

HIGH LUMEN	POWER	SIZE	OUTPUT
520614	11.3W	300*24.5*14.6	456lm/3000K
520714	20W	600*24.5*14.6	912lm/3000K
520814	30W	900*24.5*14.6	1368lm/3000K
520914	40W	1190*24.5*14.6	1824lm/3000K
521014	50W	1480*24.5*14.6	2280lm/3000K

GLPR520614-48V 300mm

GLPR520714-48V 600mm



GLPR520814-48V 900mm

LUNA S LINE 48V

LIGHT SOURCE	: 11.3W / 20W
COLOR TEMP	: 3000K
LUMEN	: 456Lm / 912 Lm
INPUT VOLTAGE	: 48VDC
DRIVER	: Not Included External 48V LRS-50-48V
CRI	: 90
SIZE	: 300*24.5*14.6mm : 600*24.5*14.6mm : 900*24.5*14.6mm



LUNA S

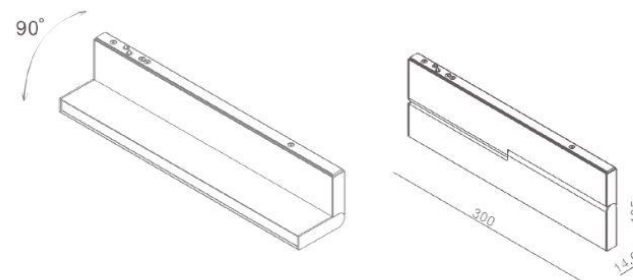


GLPR521214

LUNA ON SPOT 10 48V

LIGHT SOURCE	: 10W
COLOR TEMP	: 3000K
LUMEN	: 456Lm
INPUT VOLTAGE	: 48VDC
DRIVER	: Not Included External 48V LRS-50-48V
CRI	: 80
SIZE	: 300*105*14.6mm



552216



GLPR552216-48V
AHRI CS IN SPOT 6 48V

LIGHT SOURCE	: 3.5W
COLOR TEMP	: 3000K
LUMEN	: 350lm
INPUT VOLTAGE	: 48VDC
DRIVER	: Not Included External 48V LRS-50-48V
CRI	: 90
SIZE	: Ø180*14.6*24.5mm



DESS®

FLASH

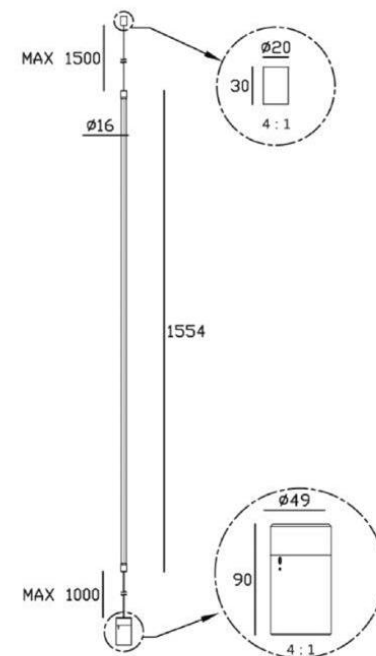

GLPR328619TD

FLASH M V RO SENSOR

LIGHT SOURCE	: 33.8W
COLOR TEMP	: 3000K
LUMEN	: 1476Lm
INPUT VOLTAGE	: 100-240VDC, 50/60Hz
CRI	: 80
SIZE	:
Ø16*1554mm	



RECOMMEND



TOUCH DIM
328619TD



ATHENA



RECOMMEND




GLPR324615ETD

ATHENA SPOT SENSOR

LIGHT SOURCE	: 5W
COLOR TEMP	: 3000K
LUMEN	: 296Lm
INPUT VOLTAGE	: 100-240VDC, 50/60Hz
CRI	: 90
SIZE	:
Ø42*130mm	

DESS®

KARINA

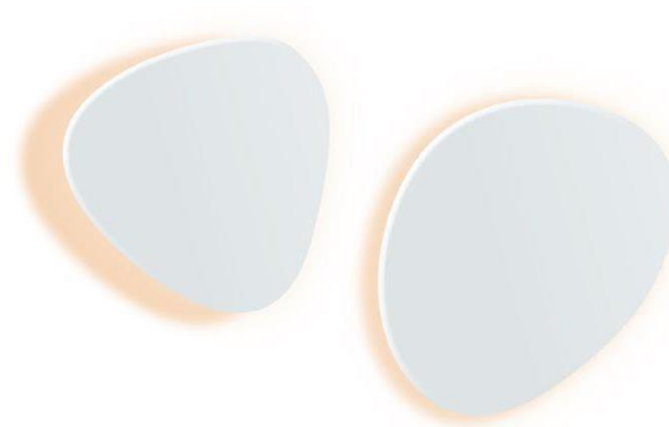

ST

SO

GLPR427614A

KARINA ST/SO

LIGHT SOURCE

: 7.5W

COLOR TEMP

: 3000K

LUMEN

: 544Lm

INPUT VOLTAGE

: 220-240VAC, 50/60Hz

CRI

: 90

SIZE

: 227*231.5*52.5

: 220*173*52.5mm



L



KARINA



KARINA



GLPR427714A

KARINA RHOMBUS

LIGHT SOURCE	: 7.5W
COLOR TEMP	: 3000K
LUMEN	: 544Lm
INPUT VOLTAGE	: 100-240VAC, 50/60Hz
CRI	: 90
SIZE	: 223.3*182.5*52





VIGRO P SS

Light changing by hand

Personalize your own lighting recipe anywhere anytime



Color dimming



Timing control



Brightness dimming



One-Click
interconnection



Scene setting



GLPR340319AP2

VIGRO P SS TRIMLESS

LIGHT SOURCE	: 4W
COLOR TEMP	: 2700K-6500K
LUMEN	: 350lm
INPUT VOLTAGE	: 240VAC
DRIVER	: WIFI Dimming
CRI	: 80
SIZE	: Ø80*82mm
CABLE LENGTH	: 1900mm





VIGRO SS

Light changing by hand

Personalize your own lighting recipe anywhere anytime



Color dimming



Timing control



Brightness dimming



One-Click
interconnection



Scene setting



GLPR122019AP2


VIRGO SS TRIMLESS

LIGHT SOURCE	: 4W
COLOR TEMP	: 2700K-6500K
LUMEN	: 350Lm
INPUT VOLTAGE	: 240VAC
DRIVER	: WIFI Dimming
CRI	: 80
SIZE	: Ø80*102.5mm

CONSTELL

FLUA brand new constellation wall lamp design, has a rich shape, and its imaginative shape gives the designer unlimited space.
CONSTELL series full with creative inspiration and can be DIY according to different spaces. Products can be widely used in home and commercial spaces (bedrooms, hotel rooms, bar counters, etc.)

© CE IP20 100-240V 2700K-6000K

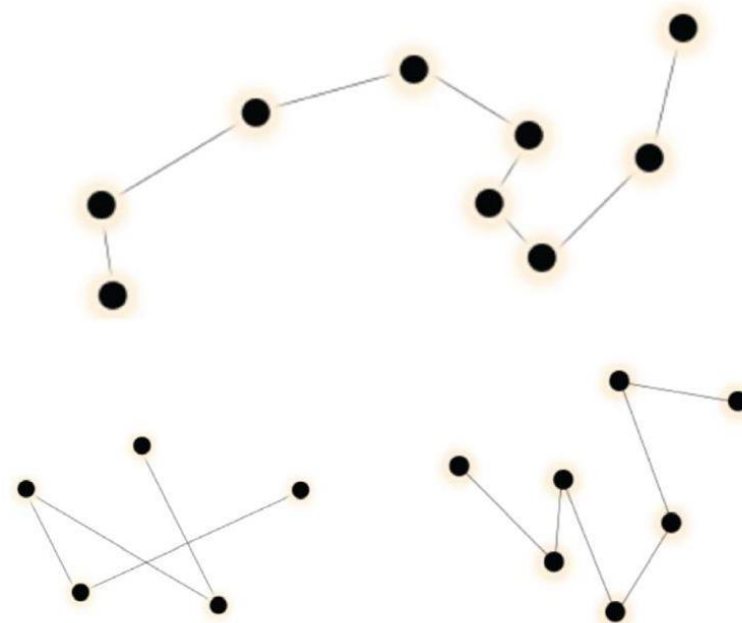

GLPR443514AP

GLPR443414AP

CONSTELL 9/7/5 SGR

LIGHT SOURCE	: 9*4.9W / 7*4.9W / 5*4.9W
COLOR TEMP	: 2700K-6000K
LUMEN	: 1700Lm / 1300Lm / 930Lm
INPUT VOLTAGE	: 24VDC
DRIVER	: LRS-75-24 / LRS-50-24 / LRS-35-24
BALLAST	: WIFI Dimming
CRI	: 80
SIZE	: Ø90*60mm/pc





STAND



STAND

STAND is iconic model tailored by FLUA's chef designers from Italy.
The very distinctive and innovative design is the icon of minimalism floor lamp.
It is the impeccable fusion of classic and vogue.
The light bar spins freely.

CE (IP20) 100-240VAC

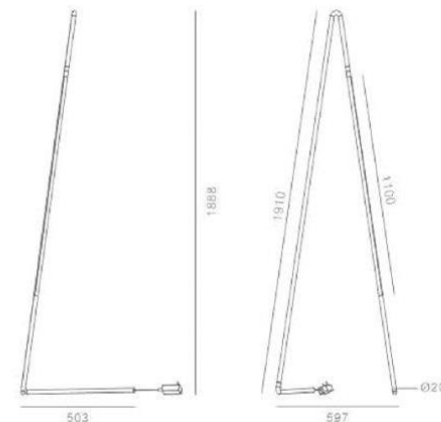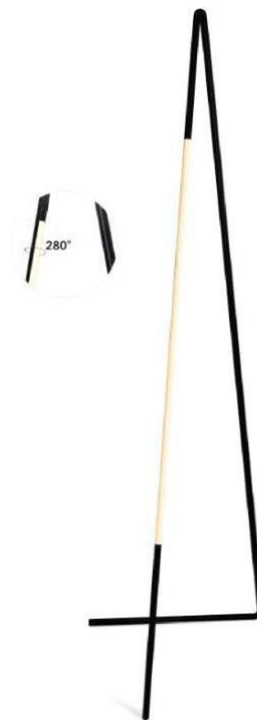

GLPR442219TD STAND SENSOR

LIGHT SOURCE	: 25.4W
COLOR TEMP	: 3000K
LUMEN	: 1685Lm
INPUT VOLTAGE	: 100-240VAC, 50/60Hz
CRI	: 90
SIZE	: 597*503*1888mm

RECOMMEND:



DESS®

ARTE P



GLPR225919A

ARTE P GROUP P1

LIGHT SOURCE	: 11.6W	
COLOR TEMP	: 3000K	
LUMEN	: 420lm	
INPUT VOLTAGE	: 100-240VAC	
CRI	: 90	
SIZE	: Ø1035*615*62mm	


ARTE P



ARTE W



ARTE W

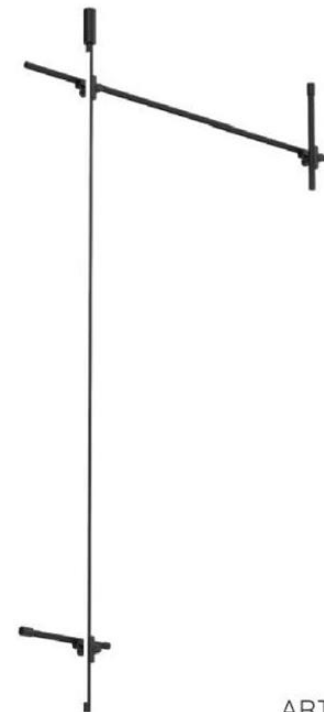

ARTE W GROUP W1

GLPR225819A

ARTE W GROUP W1

LIGHT SOURCE	: 33W	
COLOR TEMP	: 3000K	
LUMEN	: 1305Lm	
INPUT VOLTAGE	: 24VDC	
CRI	: 90	
SIZE	: Ø1617*1031*62r	





HOPPER

An elegant design that never goes out of style.
The lamp features sleek lines, geometric inspiration and delicate light.
Classical and industrial-style design suitable to use on the bedside by one lamp or on a long dining table by group.

CE IP20 220-240VAC

HOPPER



HOPPER S



HOPPER M

GLPR336919A

GLPR337119A
HOPPER S

HOPPER M

LIGHT SOURCE	: 10.5W	: 17W
COLOR TEMP	: 3000K	: 3000K
LUMEN	: 302Lm	: 541Lm
INPUT VOLTAGE	: 220-240VAC	: 220-240VAC
DRIVER	: LRS-200-24	:
LRS-200-24		
CRI	: 90	: 90
SIZE	: 200*200mm	:



HOPPER W

HOPPER WM

HOPPER WM

• VVIV	
: 10.5W	: 17W
: 3000K	:
: 302Lm	:
: 220-240VAC	:
	: 90
: 80	



AKALI

With five different dimensions for options and adjustable lamp tube,
AKALI can fully meet different lighting needs. IP54 rate allows
it to install in the bathroom or washing rooms, and it's built-in power switch on the
lamp body makes it convenient to control.

CE IP54 220-240VAC



GLPR442419A L630

LIGHT SOURCE : 11W
COLOR TEMP : 4000K
LUMEN : 400Lm
INPUT VOLTAGE : 220-240VAC,
50/60Hz
CRI : 90
SIZE :
631*61*49.7mm



GLPR442519A L930

LIGHT SOURCE : 17.1W
COLOR TEMP : 4000K
LUMEN : 590Lm
INPUT VOLTAGE : 220-240VAC,
50/60Hz
CRI : 90
SIZE :
931*61*49.7mm



LOOP IN



IN 24 1.1



IN 36 1.1



IN 12 1.1

LOOP

Super unique collection, slim black rings,
floating through the space, providing star sky effect on the ceiling.
The circle of LEDs specially designed to guarantee a uniform
and balanced areole form light effect.

LOOP is available in recessed and suspended versions in 3 dimensions.
Recessed version is equipped with magnet mechanism
for LED source special fixation.

CE (P20) 220-240VAC DIM TRIAC DALI


GLPR195017DT

LOOP IN 36

LIGHT SOURCE	: 96.58W
COLOR TEMP	: 3000K
LUMEN	: -
INPUT VOLTAGE	: 240VAC 50/60Hz
CRI	: 80
SIZE	: 985*59mm



STEVE



STEVE

No matter in the garden or by the roadside, ot's still guarding

STEVE is a perfect solution to deliver a subtle light for driveway, path or garden trail without disturbing the silence and beauty of the night, nature and surrounding architectures.

GLPR734517 STEVE 3.0

LIGHT SOURCE	: 3.2W
COLOR TEMP	: 3000K
LUMEN	: 103Lm
INPUT VOLTAGE	: 100-240VAC
BEAM ANGLE	: 8°
IP	: IP65
CRI	: 80
SIZE	: 110*110*48mm